


Sentry Batons

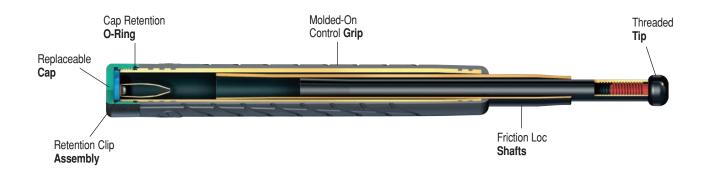

Background

4130 alloy steel tubing

Specifications

| Retracted Le | ength | | |
|--------------|-------|--------|----------|
| 1 | 6 | 6.2" | 15.75 cm |
| 2 | 21 | 7.7" | 19.56 cm |
| 2 | 26 | 9.5" | 24.13 cm |
| Expanded L | ength | | |
| 1 | 6 | 15.63" | 39.70 cm |
| 2 | 21 | 20.0" | 50.80 cm |

| 26 | 25.6" | 65.02 cm |
|----------------|--------------|-----------|
| Weight | | |
| 16 | 13.2 ounces | 374 grams |
| 21 | 16.3 ounces | 462 grams |
| 26 | 20.0 ounces | 567 grams |
| Diameter | 1" | 25.4 mm |
| Locking System | Friction Loc | |

Tubing

4130 40-45 RC 201,000 PSI Tensile

Finish

Black Nickel



Duty Cases hold ASP (16, 21, 26) Batons and feature elastic sides.



Specialty Caps (Breakaway,® Leverage, Logo, Grip) improve the performance of ASP Batons.

Tip

Carbon Steel

Grip Overmolded

Overmolded
Santoprene
Strike Force® design

Handle

Zinc undercoat O-ring sealed

Сар

6061 T6 aluminum Matte black anodized

Retention Clip

Spring steel
Patented taper design
Zinc Dichromate coated
Aluminum base



| | Sentry | ASP |
|------------------|--------------|------------------------|
| Model | S21 | F21DB |
| Steel Alloy | 4130 | 4140 |
| Type of Tubing | DOM | Seamless |
| Source of Tubing | Japan | Germany |
| Finish | Black Nickel | Black Chrome |
| Hardness | RC 40-45 | RC 48-52 |
| Tensile Strength | 201,000 PSI | 238,000 PSI |
| Grip Material | Santoprene | Kraton |
| Grip Undercoat | Zinc | Yellow Zinc Dichromate |

CapAluminumSteelCap FinishAnodizedPowder CoatedPackagingBoxClamshellWarranty1 YearLifetime

 Production
 Designed in USA by ASP
 Made in USA by ASP

 Assembled
 Taiwan
 USA

 Source
 ASP Taiwan Production
 ASP USA Production

 Target Market
 For Security Professionals
 For Law Enforcement

SideBreak and Federal Scabbards employ the latest polymer technology and are available in four finishes.







ASP Scabbards rotate to 12 distinct positions.

